



TRANQUILITY® 30 (SE) PREMIER SINGLE AND TWO-STAGE SERIES

RESIDENTIAL | Sizes: 006-072 | 60 Hz – R-454B



The Tranquility® 30 (SE) Premier Single and Two-Stage Series showcases superb efficiency ratings, quiet operation, and application flexibility that is synonymous with the ClimateMaster Tranquility family. The Tranquility SE surpasses ASHRAE 90.1 efficiency standards and utilizes R-454B low Global Warming Potential (GWP) refrigerant, setting a high standard for eco-friendly performance. Due to its innovative and environmentally-conscious design, the Tranquility SE is Energy Star Certified.

The SE Series Advantage

STANDARD FEATURES

- Sizes 006 (1/2 ton, 1.8 kW) through 072 (6 tons, 21.1 kW)
- Refrigerant Detection System (RDS) (mandatory on sizes 060 and 072, optional for sizes 006-048)
- Communicating DXM2.5 controls for reduced startup, commissioning, and service time
- Part-load operation significantly lowers annual operating costs (sizes 024-072)
- Field-convertible supply-air arrangement for horizontal units
- Intelligent variable speed Constant Volume (CV) EC blower motors for precise airflow control and soft-start feature
- Unique double-isolation compressor mounting with vibration isolation for quieter operation

CONFIGURABLE OPTIONS

- vFlow® unit-integrated modulating water valve for maximum water-flow control (replaces traditional motorized water valve and autoflow regulator)
- vFlow unit-integrated variable-speed water pump (sizes 018-072)
- Factory-installed compressor soft-starter
- Integrated power disconnect
- Domestic Hot Water Generator (HWG) (sizes 018-072)
- Compatible with iGate® 2 Smart Tanks for optimized hot water production and control



Scan for
Product Catalog

TRANQUILITY 30 (SE) PREMIER SINGLE AND TWO-STAGE SERIES

Size	Load	Motor Type	Water Loop Heat Pump				Ground Water Heat Pump				Ground Loop Heat Pump			
			Cooling 86°F		Heating 68°F		Cooling 59°F		Heating 50°F		Cooling 68°F		Heating 41°F	
			Capacity Btuh	EER Btuh/W	Capacity Btuh	COP	Capacity Btuh	EER Btuh/W	Capacity Btuh	COP	Capacity Btuh	EER Btuh/W	Capacity Btuh	COP
SE006	Full	EC	5,900	16.7	6,800	5.5	7,000	30.0	5,800	4.5	6,300	20.0	4,400	3.4
SE009	Full	EC	9,000	16.0	11,500	5.3	10,500	28.0	9,000	4.6	9,700	19.0	7,000	3.7
SE012	Full	EC	11,700	16.0	15,600	5.2	13,700	28.3	12,200	4.3	12,400	19.5	9,200	3.6
SE018	Full	EC	19,100	16.3	23,400	5.7	22,000	28.1	18,900	4.9	20,100	19.5	14,500	4.1
SE024	Part	EC	17,900	19.2	20,100	6.6	20,200	36.2	17,100	5.7	19,400	27.9	18,900	4.4
	Full	EC	25,300	17.1	29,000	5.7	28,600	26.2	23,400	5.0	26,300	19.9	17,800	4.1
SE036	Part	EC	26,400	20.2	30,600	6.5	30,200	35.3	25,800	5.6	28,500	29.7	22,700	5.0
	Full	EC	37,500	17.0	43,100	5.4	41,000	24.4	35,700	4.9	39,000	18.8	28,400	4.2
SE048	Part	EC	35,700	19.6	42,900	6.5	41,000	41.8	33,700	5.3	37,400	28.6	29,000	4.7
	Full	EC	48,000	17.2	60,200	5.3	54,600	26.0	49,100	4.5	51,700	19.4	38,100	3.9
SE060	Part	EC	42,200	18.9	44,800	5.9	48,000	32.9	35,900	4.8	46,400	27.5	30,900	4.1
	Full	EC	61,800	16.9	67,300	5.3	66,800	24.7	55,700	4.7	62,600	18.7	44,300	3.9
SE072	Part	EC	53,500	17.9	59,200	5.4	61,400	34.8	48,000	4.5	58,000	24.1	42,400	4.1
	Full	EC	72,000	16.1	81,400	4.9	77,000	22.4	67,400	4.4	74,700	18.4	54,000	3.8


Notes:

- Where dual voltages are available ratings are based on the lower voltage setting.
- Cooling capacities based upon 80.6°F DB, 66.2°F WB entering air temperature.
- Heating capacities based upon 68°F DB, 59°F WB entering air temperature.
- Ground Loop Heat Pump ratings based on 15% antifreeze solution.

Dimensional Data

Cabinet Dimensions (cm)

Model	Cabinet Config	Depth/Length			Width	Height
		A	B	C		
SE006-SE012	H	109.5	56.9	43.9	56.9	43.9
	V	54.9	56.9	87.6		
SE018	H	158.0	56.9	49.0	56.9	113.3
	V	65.0	56.9	122.9		
SE024	H	158.0	56.9	49.0	56.9	123.2
	V	65.0	56.9	123.2		
	D	65.0	56.9	133.1		
SE036	H	180.8	64.5	54.1	64.5	128.3
	V	77.7	64.5	128.3		
	D	77.7	64.5	137.8		
SE048	H	193.5	64.5	54.1	64.5	138.4
	V	77.7	64.5	138.4		
	D	77.7	64.5	148.0		
SE060-SE072	H	206.2	64.5	54.1	64.5	148.6
	V	77.7	64.5	148.6		
	D	77.7	64.5	158.1		

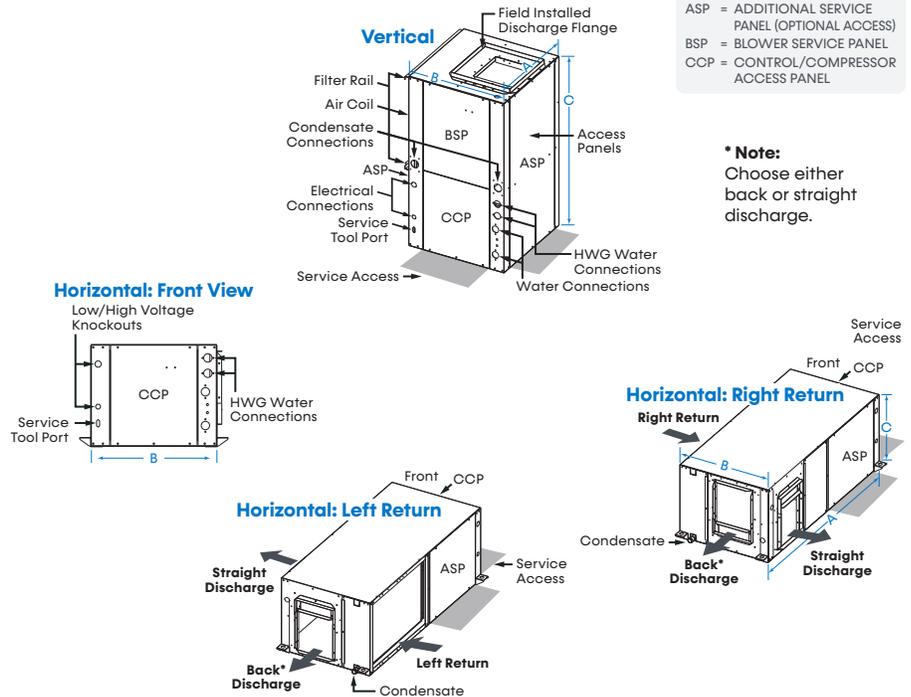

7300 SW 44th St.
 Oklahoma City, OK 73179
 Phone: 800.299.9747
 www.climatemaster.com



Part#: RP3002 | Revised: October 28, 2025

ClimateMaster works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateMaster's Customer Service Department at 800.299.9747 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateMaster's opinion or commendation of its products. The latest version of this document is available at www.climatemaster.com. Engineered and assembled in the USA. © ClimateMaster, Inc. All Rights Reserved 2025